

PrintLamB1S

The friendly & fully automatic B1 laminating machine



Main reasons to choose a TAULER PrintLamB1S


- Because it incorporates the **TAULER_OIL** system that improves lamination and reduces energy consumption
- Because its quick adjustment of the film with the machine running
- Because it incorporates the **TAULER_SHAFT SYSTEM** that facilitates the quick change of film
- For its intuitive touch screen.
- Because it incorporates a **REVERSE MODE** to correct possible errors
- Because it incorporates **TAULER_GO ON**, an automatic starting system

PrintLamB1S

The friendly & fully automatic B1 laminating machine

ADVANCED SPECIFICATIONS

- Tauler automatic feeder head pneumatically actuated
- Adjustable side bracket.
- Temperature control by sensor.
- Pneumatic pressure roller.
- Easily adjustable decurling system.
- Photocell that stops the machine in case of sheet failure.
- Total control of the machine through a PLC.
- Electronically adjustable speed
- Microperforation cutting system and scissor roller
- Pallet stacker delivery
- Optional: fixed or stacking delivery table

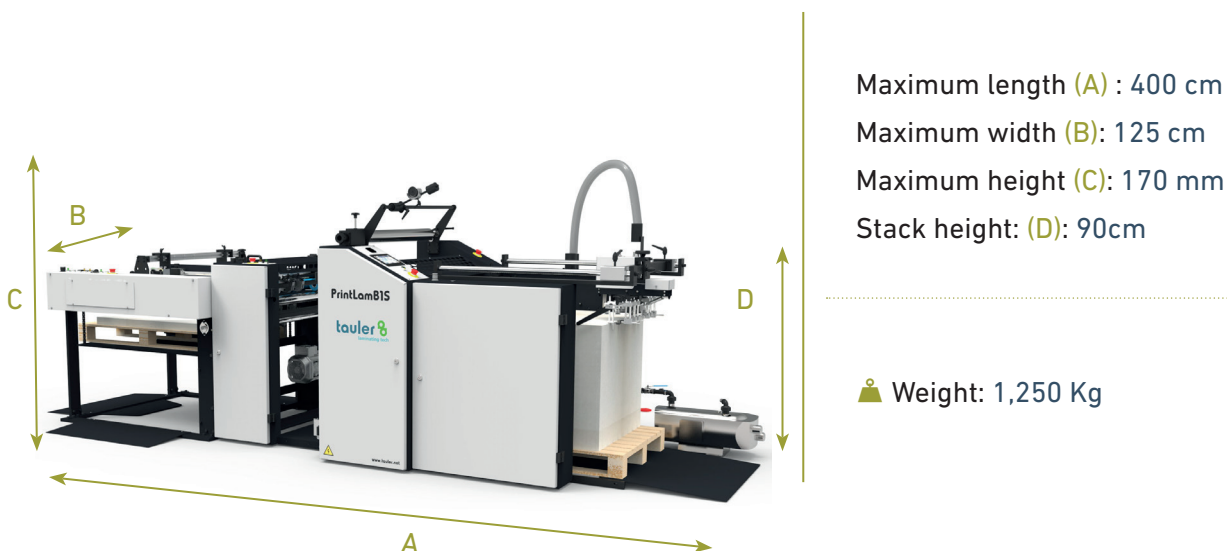

TECHNICAL DETAILS

Maximum format	750x1050 mm	Thickness of the film	20 a 42 micras
Minimum format	220x250 mm	Electrical power installed	11 KW
Maximum mechanical speed*	2 – 35 m/min*	Power supply	400 V three-phase 50 Hz
Paper thickness	from 130 to 450 gr/m ²	Safety	Protections according to CE norm, emergency stops and safety sensors
Pile height	730 mm		

* According to film, external conditions, paper type, thickness and formats.

The image shown and the information reflected in this web & brochure does not establish contractual information. TAULER reserves the right to modify the characteristics of this product without prior notice. TAULER AND PRINTLAM ARE A REGISTERED TRADEMARK OF TAULER LAMINATING TECH, SL