

PrintLamB1S H

The friendly & fully automatic B1 laminating machine



Main reasons to choose a TAULER PrintLamB1S H


- Because it has the best feeder head in the world (**HEIDELBERG**)
- Because it incorporates the **TAULER_OIL** system that improves lamination and reduces energy consumption
- Because its quick adjustment of the film with the machine running
- Because it incorporates the **TAULER_SHAFT SYSTEM** that facilitates the quick change of film
- For its intuitive touch screen.
- Because it incorporates a **REVERSE MODE** to correct possible errors
- Because it incorporates **TAULER_GO ON**, an automatic starting system

PrintLamB1S H

The friendly & fully automatic B1 laminating machine

ADVANCED SPECIFICATIONS

HEIDELBERG SM74 servo driven feeder head
Adjustable side bracket.
Temperature control by sensor.
Pneumatic pressure roller.
Easily adjustable decurling system.
Photocell that stops the machine in case of sheet failure.
Total control of the machine through a PLC.
Electronically adjustable speed
Microperforation cutting system and scissor roller
Pallet stacker delivery
Optional: fixed or stacking delivery table

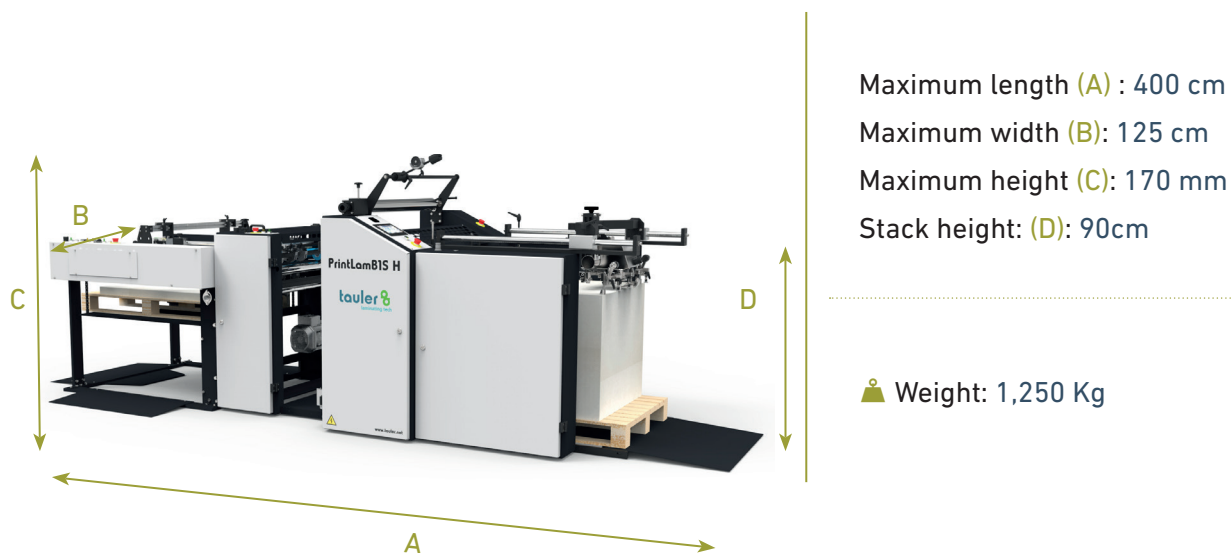

TECHNICAL DETAILS

Maximum format	750x1050 mm	Thickness of the film	20 a 42 micras
Minimum format	220x250 mm	Electrical power installed	11 KW
Maximum mechanical speed*	2 – 35 m/min*	Power supply	400 V three-phase 50 Hz
Paper thickness	from 130 to 450 gr/m ²	Safety	Protections according to CE norm, emergency stops and safety sensors
Pile height	730 mm		

* According to film, external conditions, paper type, thickness and formats.

The image shown and the information reflected in this web & brochure does not establish contractual information. TAULER reserves the right to modify the characteristics of this product without prior notice. TAULER AND PRINTLAM ARE A REGISTERED TRADEMARK OF TAULER LAMINATING TECH, SL